

Mussun Memo

Mussun Sales, Inc

December 2024



IBD2-OW and DIBD2-OW “Out of Wall or Floor” Fire Damper



Ruskin IBD2/OW & DIBD2-OW “Out of Wall” or “out of Floor” Static and Dynamic Fire Dampers are designed to be installed with the frame and blades up to 8” (203) out of the wall or floor and is supplied with a factory insulated sleeve. The IBD2/OW & DIBD2-OW can be mounted with the angle on side wall or top side of the floor. The IBD2/OW & DIBD2-OW is for when retrofitting, however, the damper can not be installed with the blades within the wall/floor. They are also used with louvers or grilles that the depth of the louver will not allow the damper to be within the plane of the wall.

FEATURES:

- Damper Styles A, BC, WC, WR and WO
- 4000 FPM Max. Vertical Mount
- 3000 FPM Max. Horizontal Mount
- 4” w.g Max. Static Pressure
- Factory supplied insulated sleeve
- CSFM 3225-0245:0005
- Static and Dynamic



Damper Sizes

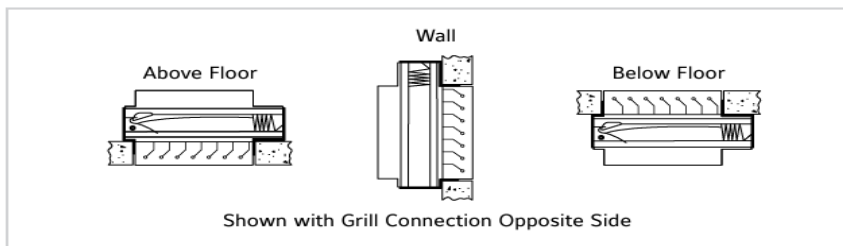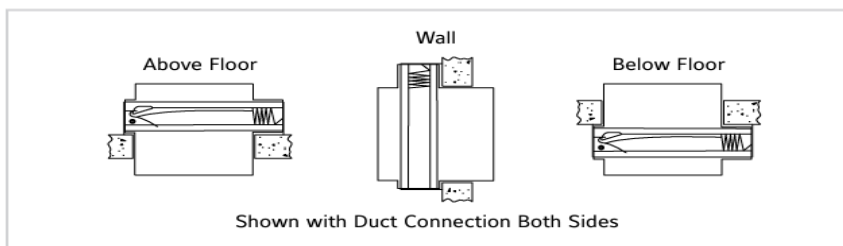

Style A- Vertical Installation – 4”w x 4”h (102x102)

Style A- Horizontal Installation- 6”w x 6”h (152x152)

Style A- Vertical or Horizontal Installation – 36”w x 36”h (914x914)



Please see your Mussun Sales Representative for more information.