




## **Introducing the Pate Sound Shield**

**The PSS is an acoustic treatment for noise transfer reduction through roof-mounted equipment curbs. It features an acoustical barrier with high specific gravity, allowing for higher absorption of sound waves, which greatly reduces sound transmission from the equipment to the interior of the building. The result is sound reductions of 13 to 75 dB, depending on the application, with ratings from STC27 to STC58.**

**The PSS can be applied inside a variety of Pate curbs, including plenum and non-plenum curbs, either in the Pate factory or in the field, if needed. It is quick and easy to install, requiring no acoustical caulk during the installation process. Each PSS treatment is engineered to match the specified piece of equipment, as well as other customer requirements.**

**The highly effective acoustical barrier, combined with superior thermal insulation and water resistance – all in a cost-effective package – makes the Pate Sound Shield unlike any other similar product currently available in the market.**

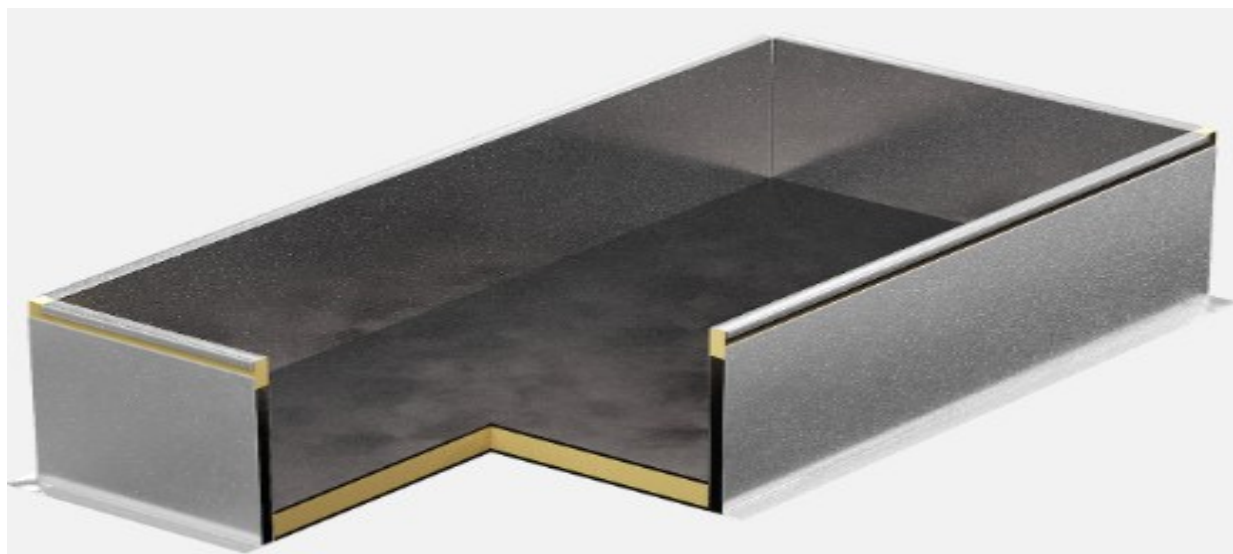

Contact your Mussun Sales Representative for more information

Cleveland, OH  
(216) 431-5088

Akron, OH  
(330) 644-8836

Columbus, OH  
(614) 294-4822

Charleston, WV  
(304) 543-5030